


# ARINA-32


# LED DOWNLIGHT

<https://horoelectric.com.ua>  
+38 (096) 8312125

Product&Family Code: **016 026 0032**



## Technical Drawing

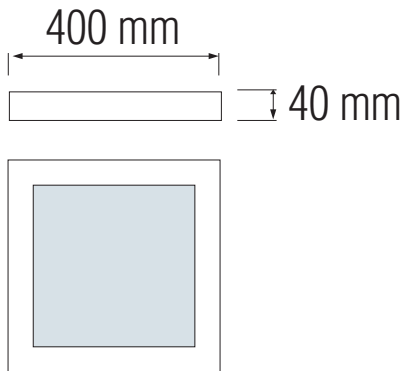


Technical Data	
Voltage (V)	220-240V
Product Wattage (W)	32
Equivalence with incandescent lamp	256
Colour Render Index (Ra)	>80
Colour Temperature (K)	3000K / 4200K / 6400K
Materials	Aluminium
Protection Class	II
Dimmable	No
EEL	A to A++
Warm-up time up to 60 % of the full light output	Instant Full Light
Luminous Flux (lm)	2240
Luminous Efficacy (lm/W)	70
Rated Life (hrs) Ⓢ	30.000
IP Rating	20
Power Factor	>0.5
Beam Angle	120°
Starting Time	<0.2s
Number of ON-OFF cycling	x25.000

## Applications

Airport, Bathroom, Bedroom, Car Park, Cinema, Gallery, Hospital, Hotel, Kitchen, Museum etc.



## Photometric Diagram

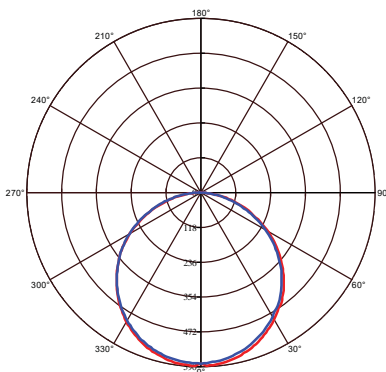

↳ C0 Plane beam angle(50%) ↳ C90 Plane beam angle(50%)  
C0 Plane beam angle(50%):113.9(DEG) C90 Plane beam angle(50%):113.9(DEG)

## Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- Innovative design of assembly structure.
- Extremely Long Life.

