

LED PROJECTOR


Product Code: **068 005 0400**

PANTER-400



 Black

Technical Drawing

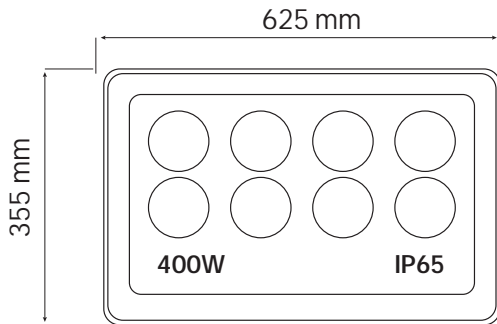


| Technical Data | |
|---|----------------------------|
| Voltage (V) | 85-265V |
| Product Wattage (W) | 400 |
| Equivalence with incandescent lamp(W) | 3200 |
| Colour Render Index (Ra) | >Ra80 |
| Colour Temperature (K) | 2700K - 4200K - 6400K |
| Materials | Aluminium Die Casting Body |
| Protection Class | I |
| Dimmable | No |
| EEI | A to A++ |
| Warm-up time up to 60 %of the full light output | Instant Full Light |
| Luminous Flux (lm) | 30000 |
| Luminous Efficacy (lm/W) | 75 |
| Rated Life (hrs) ⌚ | 50.000 |
| IP Rating | 65 |
| Power Factor | >0.9 |
| Beam Angle | 40° |
| Starting Time | <0.2s |
| Number of ON-OFF cycling | x25.000 |

Applications

- Stadiums, Outdoor



Photometric Diagram

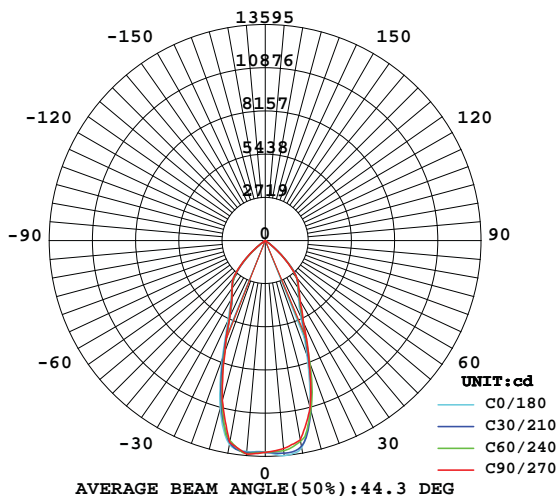

Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- COB LED Lamp Base.
- Very low energy consumption.

