

TORCH-20

LED BULB

<https://horozelectric.com.ua>
+38 (096) 8312125

Product&Family Code:


001

016


0020




Technical Drawing



Photometric Diagram

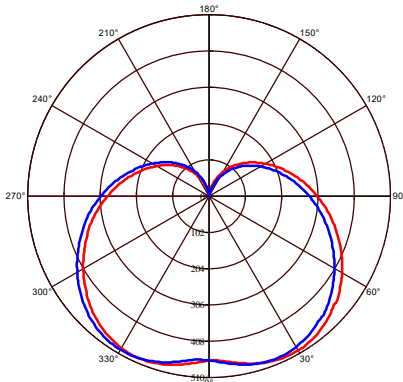

C0 Plane beam angle(50%) 200.2(DEG) C90 Plane beam angle(50%):199.8(DEG)

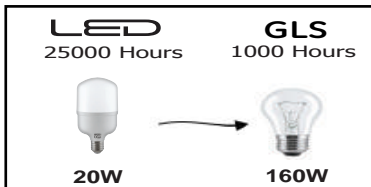

Technical Data	
Voltage (V)	175-250V
Product Wattage (W)	20
Equivalence with incandescent lamp	160
Colour Render Index (Ra)	>Ra75
Colour Temperature (K)	3000K-4200K-6400K
Materials	Aluminium + PC
Protection Class	-
Dimmable	No
EEI	A⁺
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	1650
Luminous Efficacy (lm/W)	82.5
Rated Life (hrs) ⌚	25,000
IP Rating	-
Power Factor	>0.5
Beam Angle ☆	200 °
Starting Time	>0.2s
Number of ON-OFF cycling	x20,000

Applications

- Applicable to the shops along the street, shops, shopping malls supermarkets and other indoor lighting places.



Features

- Low power consumption
- Efficient replacement for incandescent lamps
- Mercury free, no UV and IR radiation
- Instant on, 100% light output

