

UFO-15


LED UFO BULB

<https://horoelectric.com.ua>
+38 (096) 8312125


Product&Family Code: 001 044 0015




Technical Drawing



Photometric Diagram

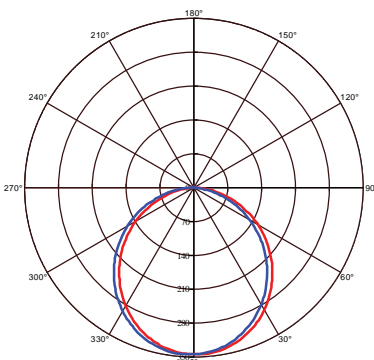

C0 Plane beam angle(50%): 109.1(DEG) C90 Plane beam angle(50%): 109.1(DEG)

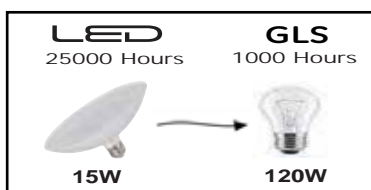

Technical Data	
Voltage (V)	160-250V
Product Wattage (W)	15
Equivalence with incandescent lamp	120
Colour Render Index (Ra)	>Ra75
Colour Temperature (K)	4200K
Materials	Aluminium Housing with PMMA Diffuser
Protection Class	-
Dimmable	No
EEL	A+
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	900
Luminous Efficacy (lm/W)	60
Rated Life (hrs) Ⓣ	25,000
IP Rating	-
Power Factor	>0.5
Beam Angle ☆	110°
Starting Time	<0.5
Number of ON-OFF cycling	x12,500

Applications

- The luminaire is an excellent solutions for market, museum, restaurant, show room, and other spot lighting needed.



Features

- Low power consumption
- Efficient replacement for incandescent lamps
- Mercury free, no UV and IR radiation
- Instant on, 100% light output

