

# PIR SENSOR

<https://horoelectric.com.ua>  
+38 (096) 8312125

Product&amp;Family Code:


088 001 0011

**ROVER**

## Technical Data

Voltage	AC 220-240V / 50-60Hz
Detection Distance	6m Max. (<24°C)
Time-delay	Min.10sec ± 5sec Max.8min ± 2min
Ambient Light	<3-2000 Lux (adjustable)
Average Load	Max.800W
Protection Class	II
IP Rating	20
Detection Motion Speed	0,6-1,5 m/s
Material	Plastic
CE Approved	Yes
Installation Height	2.2 - 4m

## Technical Drawing

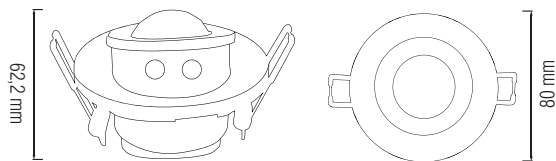

## Applications

- For use indoors

## Features

- A passive infrared sensor (PIR sensor) is an electronic sensor that measures infrared (IR) light radiating from objects in its field of view.
- The wide detection range senses an up, down, left and right field of motion.
- It works by seeing human body heat in motion via infrared rays.

